

JOST *-Montage- und Betriebsanleitung*

KUGELLENKCRÄNZE

BAUREIHEN HE, HE-W, SO, SO-W, KDL, KDL-W, L, N UND ND

- ⓐ Installation and operating intructions for
TURNTABLES
SERIES HE, HE-W, SO, SO-W, KDL, KDL-W, L, N AND ND
- ⓑ Instructions de montage et d'utilisation des
RONS D'AVANT-TRAIN
SERIES HE, HE-W, SO, SO-W, KDL, KDL-W, L, N ET ND
- ⓒ Istruzioni per il montaggio e l'uso del
RALLE A SFERE STERZANTI
SERIE HE, HE-W, SO, SO-W, KDL, KDL-W, L, N E ND
- ⓓ Instrucciones de montaje y funcionamiento
CORONA DE DIRECCIÓN DE BOLAS
SERIES HE, HE-W, SO, SO-W, KDL, KDL-W, L, N Y ND



1	Safety information	3
1.1	Safety information for servicing	3
1.2	Safety information for installation	3
2	Proper usage	3
2.1	Design	3
3	Installation	4
3.1	Standard fitting	4
3.2	Fitting instructions	5
3.3	Special fitting	5
3.4	Welded stops	6
3.5	Painting	6
3.6	Fitting material and tightening torque values	6
4	Commissioning	7
4.1	Standard turntables or slewing rings	7
4.2	Low maintenance turntables or slewing rings	7
5	Servicing	8
5.1	Standard turntables or slewing rings	8
5.2	Low maintenance turntables or slewing rings	8
6	Wear test	9

1 Safety information

1.1 Safety information for servicing

- ▶ Only use the specified lubricants for the servicing work.
- ▶ The servicing work should only be completed by trained personnel.

1.2 Safety information for installation

- ▶ Do not change the installation area defined by the manufacturer of the trailer.
- ▶ The installation work may only be completed by authorised personnel.
- ▶ Refer to the instructions issued by the trailer manufacturer, for example the type of fitting and mounting constructions.
- ▶ Follow the installation instructions supplied by the trailer manufacturer.

In Germany you must comply with the TÜV regulations and the Road Traffic and Registration Directive (StVZO).

2 Proper usage

2.1 Design


Turntables (KLK) and slewing rings (KDL) are parts for mounting on trailers and agricultural vehicles, to form a rotary connection between the A-frame and the trailer chassis. They must be operated at all times in compliance with the operating manual for the relevant vehicle.

The maximum load data for JOST turntables and slewing rings are set out in the details in the JOST product catalogue.

Turntables and slewing rings are designed exclusively for turning motions. Please ask us if you intend to use them for other applications.

3 Installation

3.1 Standard fitting

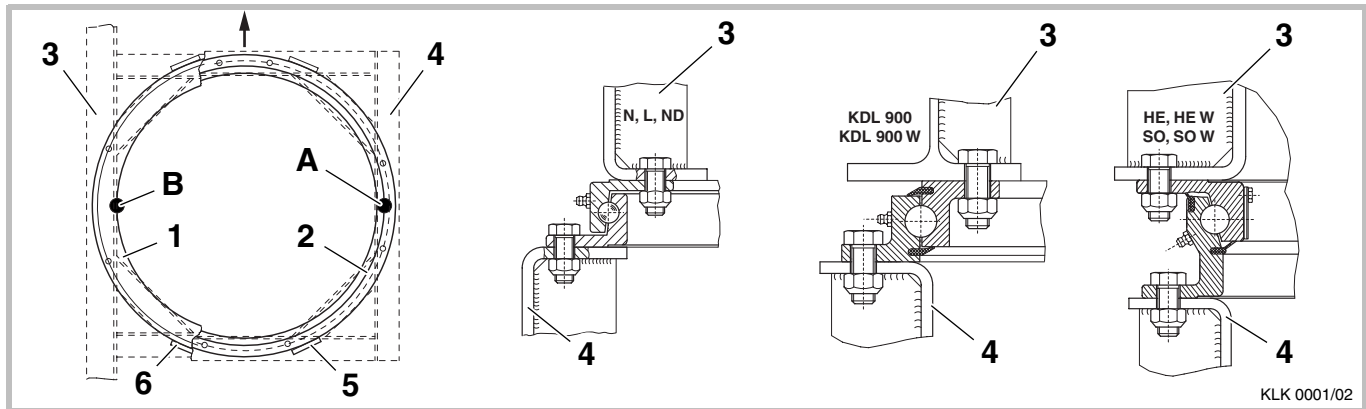

- 1 Upper ring
- 2 Lower ring
- 3 Chassis
- 4 A-frame
- 5 Lower welded stops
- 6 Upper welded stops

- A Position of **type plate** (on all series)
- B Position of **ball insertion hole** (on series HEW, SO, SOW, KDL, KDLW and on turntables HE4 and HE5)

Note

On series HE, L, N and ND the ball insertion hole is below the type plate in position **A**.

The turntable or slewing ring must be installed on a flat (max. warpage 1 mm) mounting construction that is resistant to torsion and longitudinal and lateral movement.

At least 50% of the flange areas must be supported to ensure an adequate force transfer.

The support zones must be evenly distributed longitudinally and laterally and be designed so that the turntable or slewing ring is supported around its vertical profile bars, in other words the ball race.

Large flatness deviations may be compensated by metal strips, or by filling in with plastic beneath them, etc.

3 Installation

In addition if the turntable or slewing ring has no holes, you must bear the following in mind when drilling the mounting holes.

- ▶ That no drill chips or cutting fluid gets into the raceway.
- ▶ That no holes are drilled in the vicinity (+/- 15 mm) of the ball insertion hole or in the vicinity of the welds.
- ▶ That the type plate is placed at 90° to the right of the vehicle and, if the ball insertion hole is inside, this is placed at 90° to the left of the vehicle to remove the smaller cross-sections from the area under maximum stress.
- ▶ That the grease nipples are easily accessible.
- ▶ That the components rotate freely.

3.2 Fitting instructions


Use bolts of strength class 8.8 to fasten the turntable (see section 3.6). The bolt connections are to be secured using state of the art methods to prevent them coming loose.

The turntable or slewing ring must not be fastened by welding.



The general rule is that the coating thickness of the paintwork around the securing area of the bolts must be no more than 170 µm per component to ensure a perfect friction connection.

3.3 Special fitting

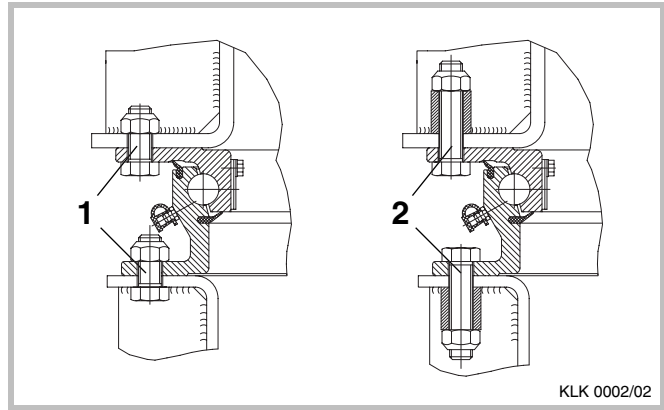


Note

If it is to be used in difficult conditions we recommend that the bolts be installed with spacer sleeves or that more bolts be used to maintain the correct prestressing force. The latter particularly applies to diameters of over 1200 mm. For different bolt connections, as shown in positions (1) and (2), it is essential to ensure that the turntable can move easily, particularly near the grease nipples and type plate.

3 Installation

3.4 Welded stops

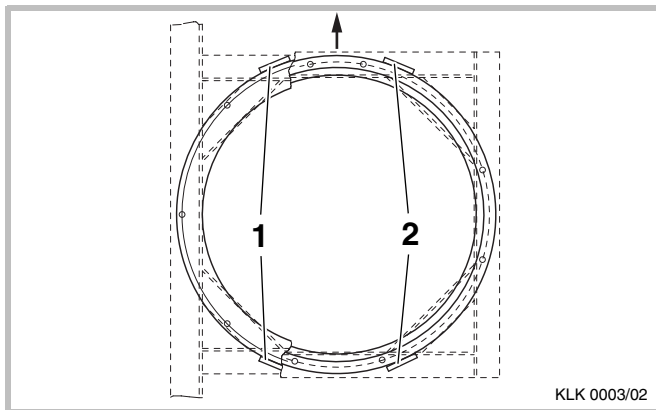

To relieve the bolts of thrust forces acting horizontally, the installed turntable or slewing ring must be holed on each flange with four welded welded stops with zero play. Use the welding methods set out by the trailer manufacturer for this purpose.

3.5 Painting

All turntables and slewing rings are supplied with a prime coating, which enables them to be painted together with the trailer. For versions with rubber washers you must ensure that the drying process takes place in controlled conditions in a heat chamber (max. air temperature 75 °C). If the washers have been glued by the paint, release them at the edge with a blunt instrument. Avoid additional paint application on the bolting areas as a result of the adverse settlement properties of the bolt connections.

3.6 Fitting material and tightening torque values

Series	Bolts in quality class 8.8	Torque
HE / HE W	Min. 8 hexagonal bolts DIN EN 28765/28676 (DIN 960/961) M16 x 1.5	225 Nm
	Alternatively DIN EN 24014 (DIN 931) M16	210 Nm
SO / SO W	Min. 8 hexagonal bolts DIN EN 28765/28676 (DIN 960/961) M16 x 1.5	225 Nm
	Alternatively DIN EN 24014 (DIN 931) M16	210 Nm
KDL 900 / 900W <= Diameter 750 mm	Min. 8 hexagonal bolts DIN EN 28765/28676 (DIN 960/961) M16 x 1.5	225 Nm
	Alternatively DIN EN 24014 (DIN 931) M16	210 Nm
KDL 900 / 900W > Diameter 750 mm	Min. 12 hexagonal bolts DIN EN 28765/28676 (DIN 960/961) M16 x 1.5	225 Nm
	Alternatively DIN EN 24014 (DIN 931) M16	210 Nm
L/N <= Diameter 650 mm	4 to 6 hexagonal bolts DIN EN 28765/28676 (DIN 960/961) M10 x 1.25 or M12 x 1.5	52 Nm 89 Nm
	Alternatively DIN EN 24014 (DIN 931) M10 or M12	49 Nm 85 Nm

3 Installation

Series	Bolts in quality class 8.8	Torque
L/N > Diameter 650 mm	Min. 8 hexagonal bolts DIN EN 28765/28676 (DIN 960/961) M10 x 1.25 or M12 x 1.5 Alternatively DIN EN 24014 (DIN 931) M10 or M12	52 Nm 89 Nm 49 Nm 85 Nm
ND	Min. 8 hexagonal bolts DIN EN 28765/28676 (DIN 960/961) M14 x 1.5 Alternatively DIN EN 24014 (DIN 931) M14	145 Nm 135 Nm

Series	Nuts in quality class 8
All	DIN EN ISO 7042 (DIN 980)

Note

The values shown above are guide values for a coefficient of friction $\mu_{\text{tot.}} = 0.14$. For further information refer to VDI 2230.
Tighten the bolts crossways using a suitable tool.
If you fasten the turntable with fewer bolts or with smaller bolts, you must at least achieve the same overall strength.

4 Commissioning

4.1 Standard turntables or slewing rings

Standard turntables or slewing rings are supplied with a thin coating of lubricant.



» Before being used for the first time the turntable must be greased thoroughly by inserting a high quality grease (lithium saponified NLGI consistency class 2) through all the grease nipples and a closed grease bead should be used to seal the gaps against the ingress of dirt and spray water. «

4.2 Low maintenance turntables or slewing rings

Low maintenance turntables or slewing rings (green type plate) are supplied with a full charge of special grease, which, in combination with the two washers, means that they require absolutely no maintenance for up to three years or 300,000 km in normal conditions.

No greasing is required when the components are used for the first time. After surpassing the above maintenance-free time/distance the turntable or slewing ring must be greased thoroughly.

Note

If you use a central lubrication system we recommend that you use a high quality roller bearing grease (lithium saponified, NLGI consistency min. 1).

Ensure that you connect at least 6 grease nipples.

5.1 Standard turntables or slewing rings

The turntable or slewing ring must be greased with a high quality grease (lithium saponified, NLGI consistency class 2) at least every 8,000 to 10,000 km or once per month. This is done by moving the A-frame to and fro until a bead of grease, which is as closed as possible, is emitted over the entire circumference of the gaps or washers.

- ▶ If you use the turntable or slewing ring in forced steering systems, comply with the servicing instructions supplied by the vehicle manufacturer.
- ▶ The bolt connections are to be checked as part of the vehicle inspection routine but at the latest after 50,000 km, to ensure they still comply with the specified tightening torques.
- ▶ Check for signs of wear (see section 6).
- ▶ Check the turntable or slewing ring and its fitting elements for signs of corrosion, damage and cracks.

5.2 Low maintenance turntables or slewing rings

Low maintenance turntables or slewing rings require no maintenance for up to 3 years or 300,000 km in normal conditions.

The prerequisite for this, however, is that no mechanical damage has been suffered by the washers and that the vehicle is not cleaned near the bearing seals with high pressure or steam jets.


The components must be greased before the end of the maintenance-free period if the turntable is used in difficult conditions or cleaned using intensive methods. After the elapse of the maintenance-free period the low maintenance turntable or slewing ring should undergo the same treatment as standard versions.

- ▶ If you use the turntable or slewing ring in forced steering systems, comply with the servicing instructions supplied by the vehicle manufacturer.
- ▶ The bolt connections are to be checked as part of the vehicle inspection routine but at the latest after 50,000 km, to ensure they still comply with the specified tightening torques.
- ▶ All other greasing intervals are 8,000 to 10,000 km or once per month.
- ▶ Check for signs of wear (see section 6).
- ▶ Check the turntable or slewing ring and its fitting elements for signs of corrosion, damage and cracks.

6 Wear test

Turntables and slewing rings are wear parts. Regular and effective lubrication is essential to obtain a long service life from them. When the gap size reaches its minimum value the wear limit has been reached.

This occurs at the latest when at any point on its circumference the horizontal gap **X** has reached the value shown in the table below.

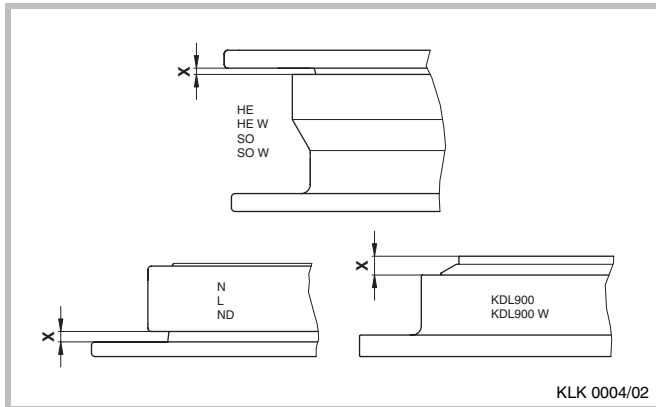

Series	Maximum axial play	Minimum gap X
HE / SO	3.5 mm	0.0 mm
HE W / SO W	3.5 mm	2.2 mm
KDL 900 / 900 W	3.5 mm	7.5 mm
L / N	2.5 mm	1.0 mm
ND	3.5 mm	0.0 mm

JOST

Siemensstraße 2, D-63263 Neu Isenburg, Telefon +49 (0) 61 02-2 95-0 Fax +49 (0) 61 02-2 95-98 www.jost-world.com

ZDE 199 001 010 08/2005